

This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©



D

C

B

A

D



C

B

A



1 : 1

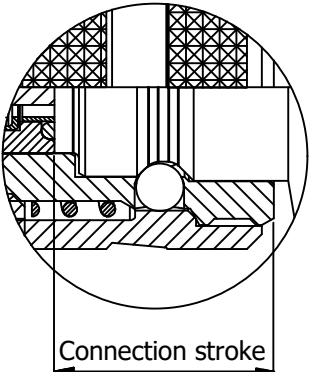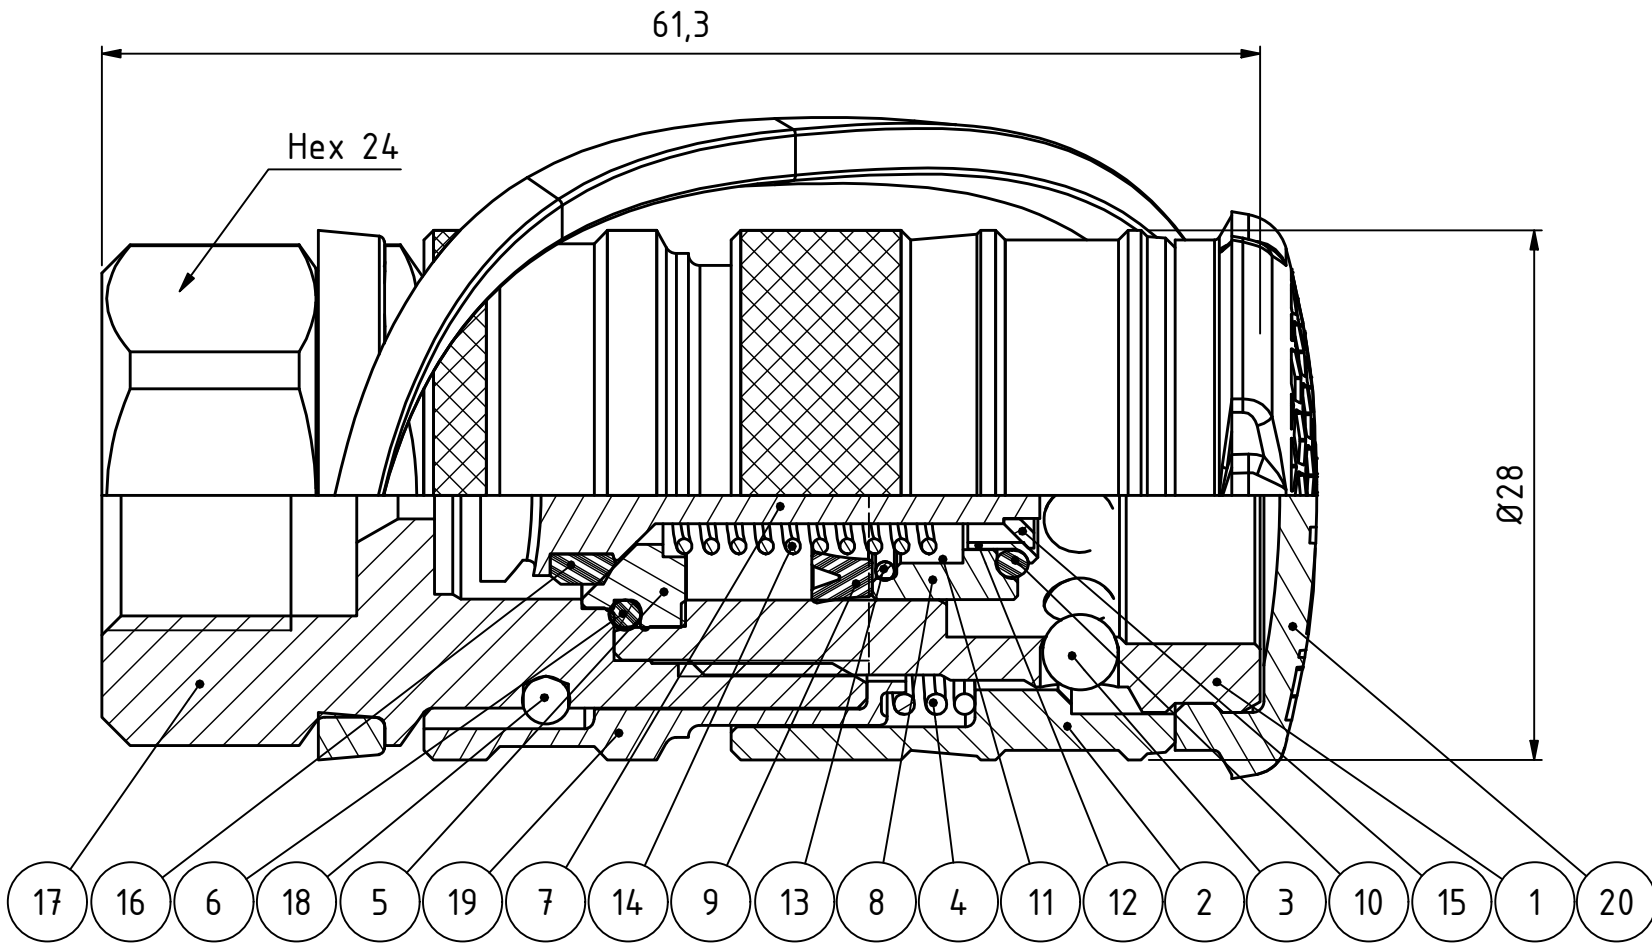

Product No. 101161790	
Nominal flow Ø DN:	2,5 mm
Connection Stroke:	18,3 mm
Max WP Connected:	1500 bar
Max WP Disconnected:	1500 bar
Min BP Connected:	3000 bar
Min BP Disconnected:	3000 bar
Temperature range:	-30°C - +100°C
Connection:	9/16"-18 UNF Fem
Sealing material:	NBR
Hexagon:	24

20	1	Dust Cap	TPE, black
19	1	Sleeve	Stainless steel
18	2	Ball	Stainless steel
17	1	Back part	Stainless steel
16	1	Seal	NBR
15	1	Washer	Stainless steel
14	1	Spring	Stainless steel
13	1	O-ring	NBR
12	1	O-ring sleeve	Stainless steel
11	1	Spring housing	Stainless steel
10	1	O-ring	NBR
9	1	Lip seal	NBR
8	1	Expansion sleeve	Plastic
7	1	Valve	Stainless steel
6	1	O-ring	NBR
5	1	Valve seat	Stainless steel
4	1	Spring	Stainless steel
3	9	Ball	Stainless steel
2	1	Locking sleeve	Stainless steel
1	1	Front part	Acid proof steel.
Item	Qty	Description	Material

	Scale	5:2	Drawn	CABAO	Checked	FR	Appr.	JE	ECO	12063	Date	2018-04-24
	Assembly Drawing		101161790		Drawing No.		Issue		Sheet		B 1/(1)	